

TECHNICAL SPECIFICATION

System Type: 2.4 GHz wireless transmitter/receiver

Camera (including antenna) Art. No. 2005

Operating frequency	2400 – 2483.5 MHz
Maximum output power	20 dBm
Operation temperature	– 20°C to + 60°C
IP classification camera	IP66
Minimum illumination	0 Lux
Night vision range	5 m
Angle of view	120°
Power supply camera	12 V – 32 VDC
Power consumption camera	4.5 W
Size (W x H x D)	10 cm x 8 cm x 9 cm
Weight	397 g

Monitor (including antenna) Art. No. 3007

Operating frequency	2400 – 2483.5 MHz
Operation temperature	– 10°C to + 60°C
Monitor brightness	400 cd/m ²
Monitor resolution	800 x 480
Power supply monitor	6 V–32 VDC
Power consumption monitor	5.3 W
Size (W x H x D)	15 cm x 9 cm x 5.5 cm
Weight	176 g




LUDA FARM

Luda.Farm, Krokslätts fabriker 30, 43137 Mölndal, Sweden

LudaFarm_QIG_trailerCam5D_2017-01


EXTRA CAMERA

Available through your local dealer

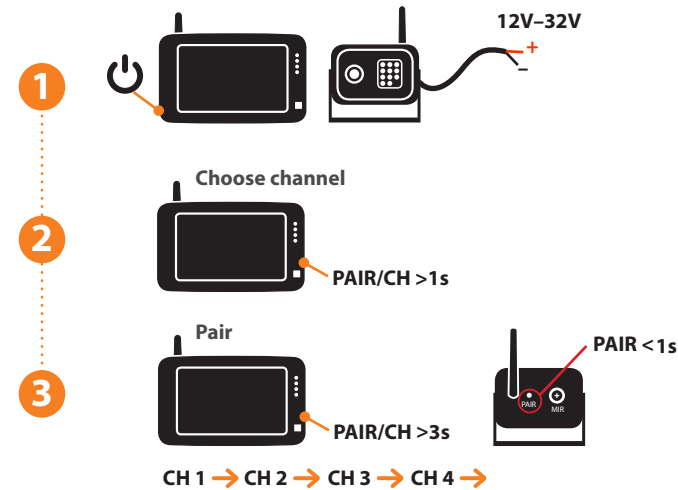

FLEXI PACK X POWER BANK

Available through your local dealer

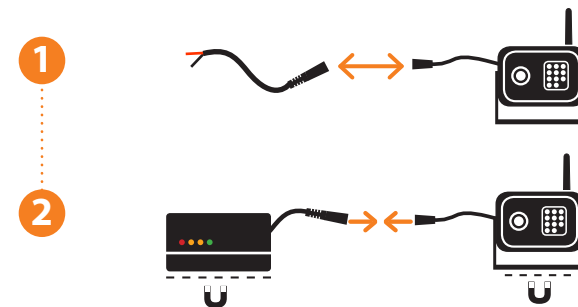

FAQ

- 1. Is the signal between the camera and the receiver encrypted?**
Yes.
- 2. How many cameras does the system support?**
4 cameras.
- 3. Why does the frame rate sometimes drop when I am driving?**
When driving the signal reception might drop sometimes. This occurs as the signal to the receiver is constantly transmitted from different angles. This is considered normal when transmitting wirelessly.
- 4. Is the camera water resistant?**
The trailerCam 5D camera is IP66 classed. This means that the camera is well protected from both dust and humidity. It can be placed outside and can be cleaned using a pressure washer.
- 6. Can I hear sound from the camera?**
No, the camera does not have a microphone.
- 7. I am using the camera for reversing, how do I mirror the image?**
Please see the instructions in the "Operation" section.
- 8. What do I do if I have bad reception on the LCD-monitor?**
Start by reading through the troubleshooting.
If troubleshooting doesn't help, visit www.ludamanuals.com or www.ludaelektronik.com.
- 9. Will the camera break at very low temperatures?**
No, at very low temperatures the picture might tone into red.
At extremely low temperatures the camera might turn off. However, when the temperature gets higher again the camera will regain its functionality.
- 12. Further questions?**
You are always welcome to visit our website www.luda.farm or contact your local sales representative.

DA/DE/ES/FI/FR/IT/NO/NL/PL/SV → www.ludamanuals.com



trailerCam 5D

QUICK GUIDE



For more detailed information



→ www.ludamanuals.com

Register your product today
to get the 3 year warranty.
luda.farm/warranty-register




INCLUDED IN THE BOX




Camera

Art. No. 2005



5" Monitor

Art. No. 3007



12V Power Cable

Art. No. 6047



Monitor Holder

Art. No. 7034



Direct Power Cable

Art. No. 6048



Installation Kit

For mounting the camera

INSTALLATION



1 Power off  off on



1 Power off  off on




or



Authorized service center recommended


OPERATION

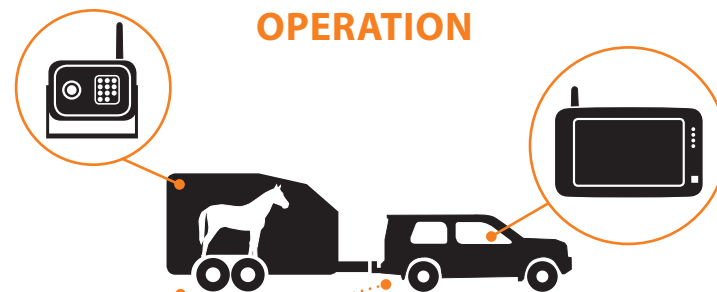

1 Power on  off on



Channels

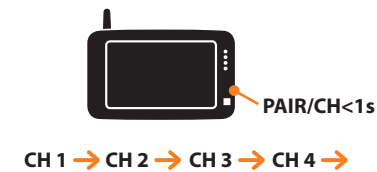

Do not operate while driving

TROUBLESHOOTING

